

Demi

Mirco Crosatto

2019

When switched off, Demí is a large, transparent dome. When switched on, the lower edge and the thousands of laser micro-incisions on the surface emit soft and uniform light thanks to the exclusive OptiLight™ technology. The light is generated by an invisible LED bulb inside the ring of the large upper opening that, like in Rome's ancient Pantheon, is the source of light. • **Heat-blown PMMA diffuser, aluminum ring, metal wire casing. Finish: white/transparent.**

Demì, lorsqu'il est éteint, est une grande coupole transparente. Grâce à la technologie exclusive OptiLight™, lorsqu'il est allumé, le bord inférieur et les milliers de micro-incisions laser de la surface diffusent une lumière douce et homogène. Celle-ci est générée par une source LED invisible située dans l'anneau du grand trou supérieur qui, comme dans l'ancien Panthéon, est la source de lumière. • **Diffuseur en PMMA soufflé à chaud, anneau en aluminium, pavillon en métal. Finition : blanc/transparent.**

Cuando está apagada, Demí es una gran cúpula transparente. Gracias a la exclusiva tecnología OptiLight™, cuando se enciende, el borde inferior y los miles de micrograbados láser de la superficie difunden una iluminación suave y homogénea. Es generada por una fuente LED invisible situada en el anillo del gran orificio superior que, como sucede en el antiguo Panteón, es el origen de la luz. • **Difusor en PMMA termosoplado, anillo de aluminio, cubierta de cable en metal. Acabado: blanco/transparente.**





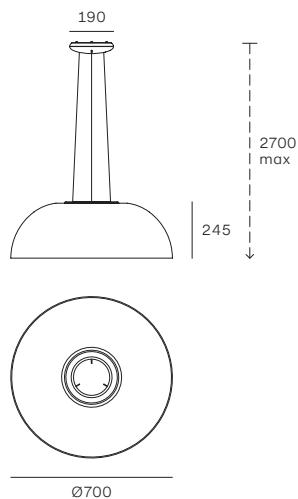
Suspension • Demí



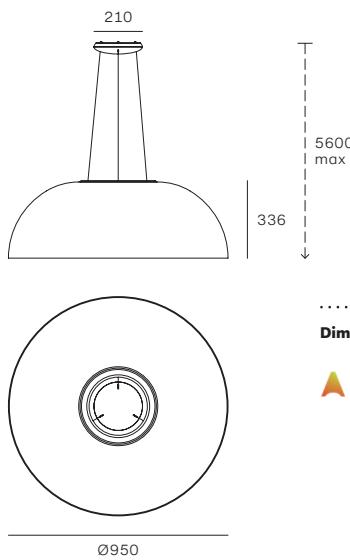



Suspension • Demí



1. Demí Ø70**Dimming kits**

- KIT0079**
DALI / 1 art / in
- KIT0080**
PH-CUT / 1 art / in
- KIT0026**
PH-CUT / 1-3 art

2. Demí Ø95**Dimming kits**

- KIT0079**
DALI / 1 art / in

MOD	CODE	FINISH	SOURCE	INPUT	DIMMING	CCT (K)	LUMEN	CRI	IP	OPTICS
1	8890		TopLED 37W	220-240V	DALI Push	3000	4198	80	20	Diffused
	8892		TopLED 33W	220-240V	Phase-cut	3000	3748	80	20	Diffused
2	8891		TopLED 55W	220-240V	DALI Push	3000	6219	80	20	Diffused