

ULULÌ AND ULULÀ floor lamp

Matteo Ugolini design


year 2013

TECHNICAL SHEET - M648PB-EXT

STRUCTURE "A"

material	fiberglass/ lace	
colour	white	

ELECTRICAL CABLE "C"

material	neoprene	
colour	green	

ELECTRICAL SYSTEM

socket	E27
source	max 1x70w
energy class	from E to A++

PACKAGING

nr. of collis	1
net weight/kg	3,5
gross weight/kg	5,7
packaging/cm	50x50x70

EMISSION OF LIGHT

one-directional




CERTIFICATION

IEC	60598-1:2008
EN	60598-1:2008 + A11:2009




IP rate	IP65
bulb	class A equipped

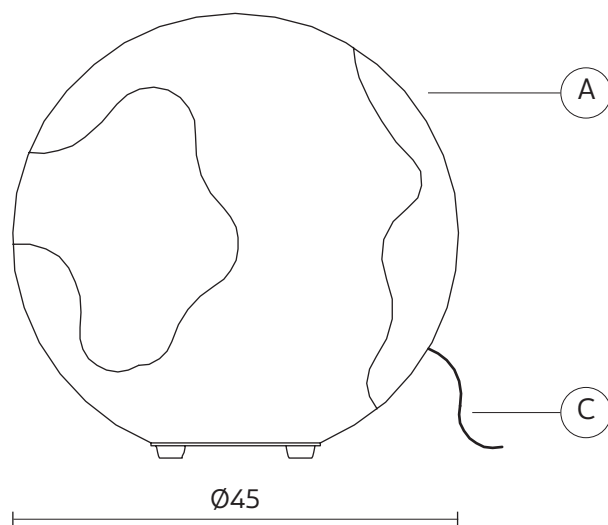

COLLECTION

available also as: suspension (indoor/outdoor)

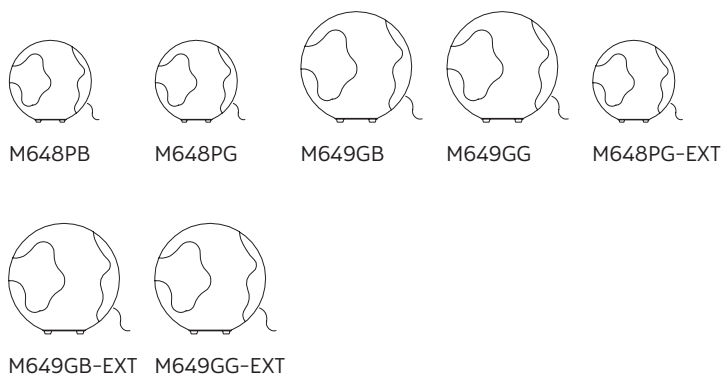

ULULÌ AND ULULÀ floor lamp

Matteo Ugolini design


year 2013

TECHNICAL SHEET - M648PB

STRUCTURE "A"

material	fiberglass/ lace	
colour	white	

ELECTRICAL CABLE "C"

material	PVC	
colour	transparent	

ELECTRICAL SYSTEM

socket	E27
source	max 1x70w
energy class	from E to A++

PACKAGING

nr. of collis	1
net weight/kg	3,5
gross weight/kg	5,7
packaging/cm	50x50x70

EMISSION OF LIGHT

one-directional




CERTIFICATION

IEC	60598-1:2008
EN	60598-1:2008 + A11:2009




IP rate	IP20
bulb	class A equipped

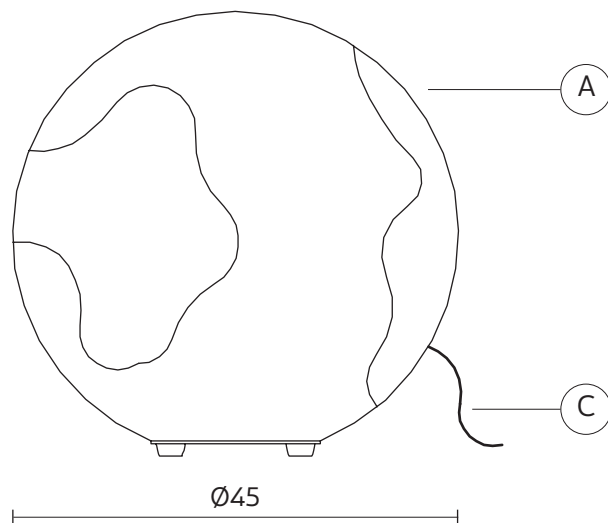

COLLECTION

available also as: suspension (indoor/outdoor)

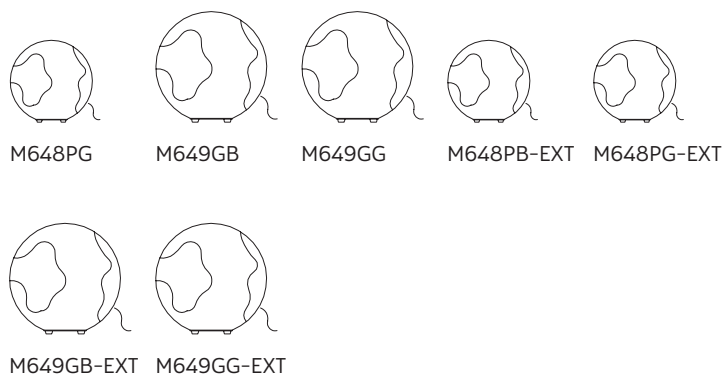

ULULÌ AND ULULÀ floor lamp

Matteo Ugolini design


year 2013

TECHNICAL SHEET - M649GB-EXT

STRUCTURE "A"

material	fiberglass/ lace	
colour	white	

ELECTRICAL CABLE "C"

material	neoprene	
colour	green	

ELECTRICAL SYSTEM

socket	E27
source	max 1x105w
energy class	from E to A++

PACKAGING

nr. of collis	1
net weight/kg	8
gross weight/kg	12
packaging/cm	93x93x93

EMISSION OF LIGHT

one-directional




CERTIFICATION

IEC	60598-1:2008
EN	60598-1:2008 + A11:2009




IP rate	IP65
bulb	class A equipped

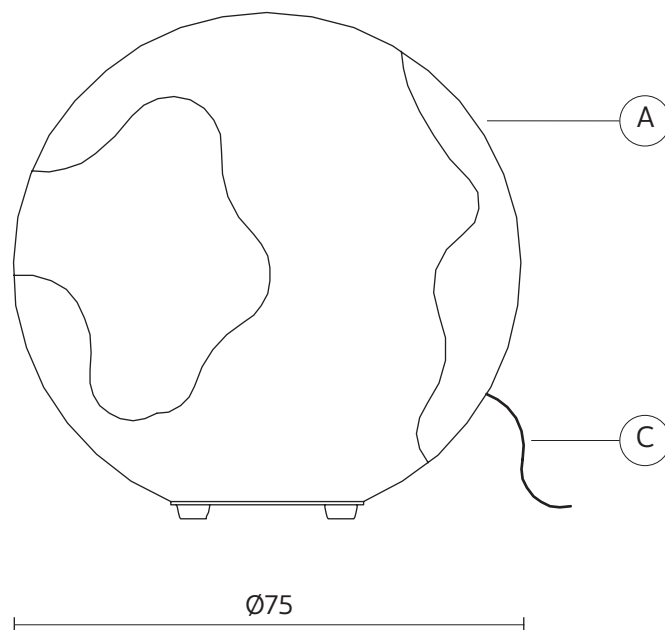

COLLECTION

available also as: suspension (indoor/outdoor)

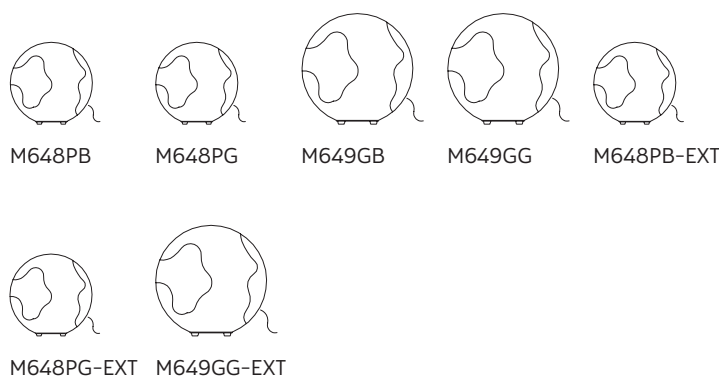

ULULÌ AND ULULÀ floor lamp

Matteo Ugolini design


year 2013

TECHNICAL SHEET - M649GB

STRUCTURE "A"

material	fiberglass/ lace	
colour	white	

ELECTRICAL CABLE "C"

material	PVC	
colour	transparent	

ELECTRICAL SYSTEM

socket	E27
source	max 1x105w
energy class	from E to A++

PACKAGING

nr. of collis	1
net weight/kg	8
gross weight/kg	12
packaging/cm	93x93x93

EMISSION OF LIGHT

one-directional




CERTIFICATION

IEC	60598-1:2008
EN	60598-1:2008 + A11:2009



IP rate	IP20
bulb	class A equipped

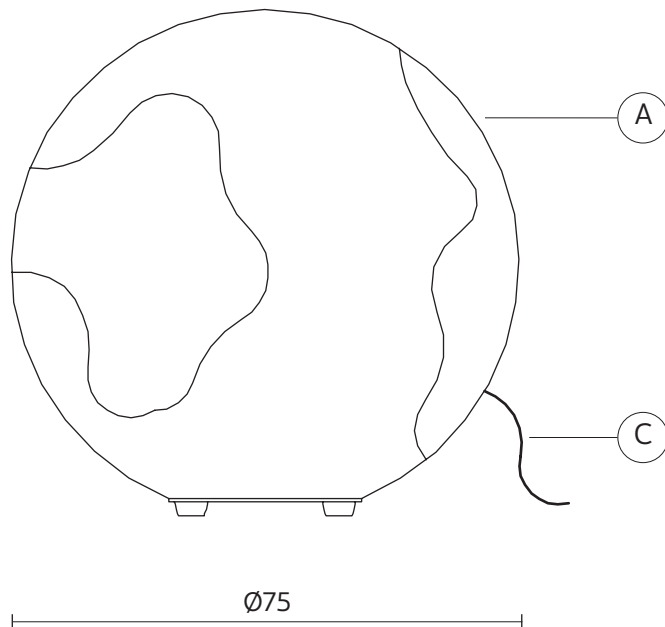

COLLECTION

available also as: suspension (indoor/outdoor)

